

ENTRY DOORS

Dimensions & Specifications Guide





With Andersen, create an entry door with character and handcrafted origins, built in solid fine-grain wood. Styled to suit you perfectly. One of a kind. Like your home. And like you.



EXTERIOR & INTERIOR OPTIONS

Make a bold first impression with color – choose from 50 commercial-grade, aluminum exterior color options or a selection of anodized finishes for a rich, lustrous metallic appearance. On the interior of the door, choose from our painted options or enjoy the look of unfinished wood. For a unique look, custom colors are available on the interior or exterior of the door.

ALUMINUM-CLAD EXTERIOR COLORS

Colony White	White	Abalone	Balsa White	Canvas	Maple Syrup	Harvest Gold	Prairie Grass	Flagstone	Sandtone	Pebble Tan	Carmel	Terratone	Hot Chocolate
Bourbon	Acorn	Coffee Bean	Cocoa Bean	Sierra Bronze	Dark Bronze	Clay Canyon	Red Rock	Cardinal	Bing Cherry	Fire Engine Red	Cinnamon Toast	Olive	Sage
Billiard Green	Moss	Forest Green	Mallard Green	Spearmint	Aquamarine	Patina	Sky Blue	Country Blue	Blue Denim	Watercolor Blue	Caribbean Blue	Slate	Moody Blue
Stormy Blue	Dove Gray	Harbor Mist	Yorktown Pewter	Smokey Gray	Mystic Gray	Dark Ash	Black						

INTERIOR & EXTERIOR WOOD SPECIES

Pine	Mixed Grain Douglas Fir	Oak	Maple	Hickory	Mahogany*	Cherry	Walnut	Vertical Grain Douglas Fir	Alder	White Oak

INTERIOR PAINTED COLORS

White	Birch Bark	Primed (for paint)	Canvas	Sandtone	Terratone	Forest Green	Dark Bronze	Dove Gray	Prairie Grass	Red Rock	Cocoa Bean	Black	Anodized Silver

Available on pine. Black and dark bronze also available on maple. Anodized silver available only on maple.

*Actual wood species is either Sapele or Sipo, both non-endangered species grown in Africa, with color and characteristics similar to Central American mahoganies. Naturally occurring variations in grain, color and texture of wood makes each window or door one of a kind. Printing limitations prevent exact duplication of colors and finishes. Please see your Andersen supplier for actual color and finish samples.

OPTIONS & ACCESSORIES

HARDWARE*

Choose from Andersen® hardware or have your door prepped for hardware manufactured by others.



ANVERS®
Bright Brass
Oil Rubbed Bronze
Satin Nickel



YUMA®
Distressed Bronze
Distressed Nickel



NEWBURY®
Antique Brass
Bright Brass
Brushed Chrome
Oil Rubbed Bronze
Polished Chrome
Satin Nickel



ALBANY
Black
Gold Dust
Stone
White



COVINGTON™
Antique Brass
Bright Brass
Oil Rubbed Bronze



ENCINO®
Distressed Bronze
Distressed Nickel



WHITMORE®
Antique Brass
Bright Brass
Oil Rubbed Bronze
Satin Nickel



TRIBECA®
Black
Stone
White

FSB® HARDWARE*

Durable FSB hinged door hardware features clean lines and a sleek finish for a thoroughly modern look.



1035



1075



1076



1102**

Black Anodized Aluminum
Satin Stainless Steel

Satin Stainless Steel

YALE® ASSURE LOCK®*

The Yale Assure Lock† allows you to monitor, lock and unlock your door from anywhere.



Black



Satin Nickel



White

Bold name denotes finish shown.

GRILLE OPTIONS

Grilles patterns and types are shown below and are available in four standard widths: ¾", 7⁄8", 1 ⅛" and 1 ½".



Colonial




Prairie




Specified
Equal Light



Full Divided Light
Permanent exterior
Permanent interior with spacer



Removable Interior
Removable interior



Simulated Divided Light
Permanent exterior
Permanent interior



**Simulated Divided Light with
Removable Interior Grilles**
Permanent exterior
Removable interior


*Hardware sold separately.
**FSB style 1102 is not available in black anodized aluminum.
†Available on select hinged doors, see your Andersen supplier for details.
Tribeca and Albany hardware are zinc die cast with powder-coated durable finish.
Other hardware is solid forged brass.

Distressed bronze and oil rubbed bronze are “living” finishes that will change with time and use.
Bright brass and satin nickel finishes on patio door hardware feature a 10-year limited warranty.
Printing limitations prevent exact finish replication. See your Andersen supplier for actual finish samples.
“FSB” is a registered trademark of Franz Schneider Brakel GmbH & Co.
Yale manufactures and supports the limited warranty for Yale Assure Lock for Andersen doors.

DOOR STYLES

Enhance your curb appeal by choosing from a variety of door styles to fit your taste. All styles are offered as single or double doors. Please visit [andersenwindows.com/entry doors](https://andersenwindows.com/entry-doors) to see all styles.



STRAIGHTLINE – GLASS PANEL

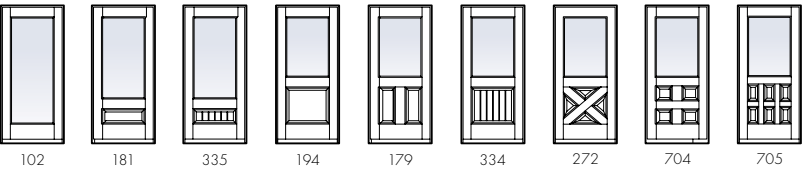

ARTS & CRAFTS




STRAIGHTLINE – FULL PANEL

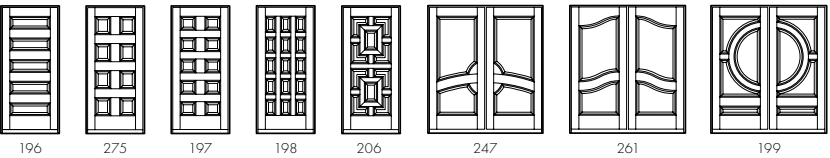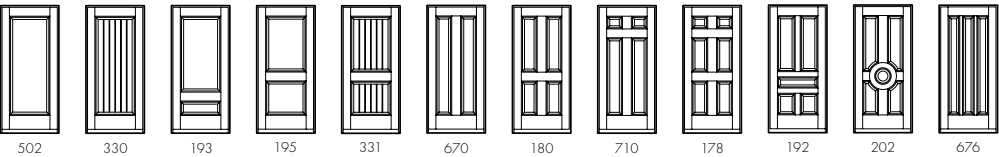


ARCH – GLASS PANEL




ARCH – FULL PANEL

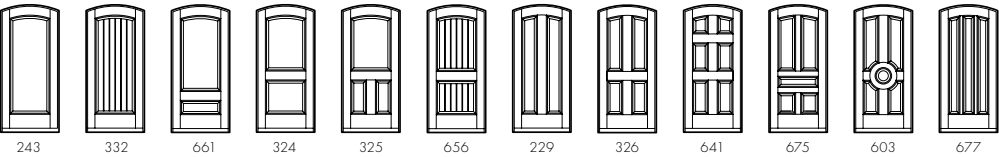

SIDELIGHTS

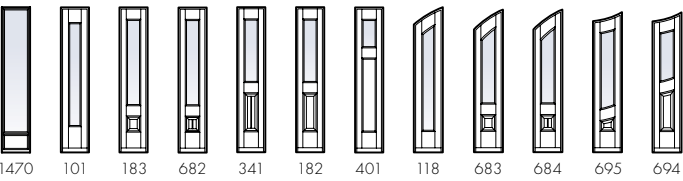

TRANSOMS




RESIDENTIAL ENTRY DOORS




Rectangular Entry Door Order Designation Description

Viewed from the exterior.

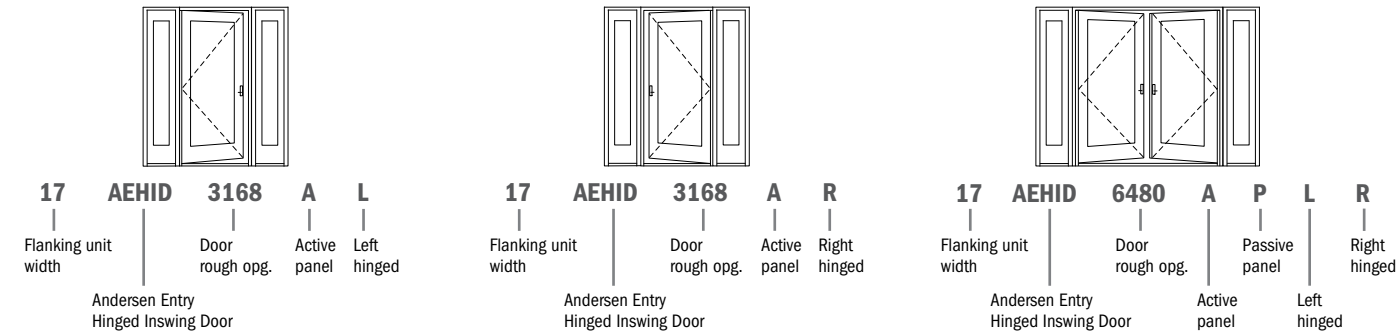


Inswing entry doors (AEHID) shown above, for outswing entry doors use AEOD. Outswing entry doors open outward to the exterior.

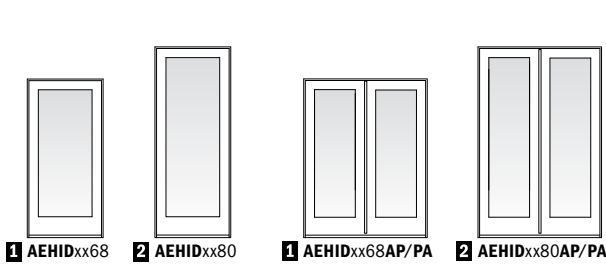

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. AEHID2068S or AEHID4068SS).

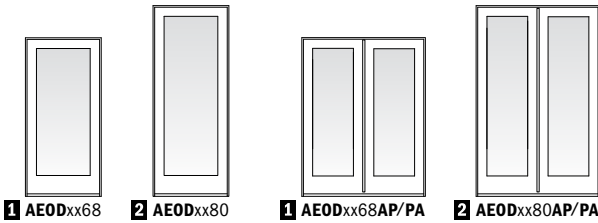

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. AEOD2068S or AEOD4068SS).

Rectangular Outswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions		Min. Rough Opening		Clear Opening Sq. Ft. / (m ²)	Clear Opening Maximums				Vent Sq. Ft. / (m ²)	Overall Door Area Sq. Ft. / (m ²)
		Width Inches / (mm)	Height Inches / (mm)	Width Inches / (mm)	Height Inches / (mm)		90° Width Inches / (mm)	Full Width Inches / (mm)	Height Inches / (mm)			
AEOD2068	1	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.68 (1.18)	21 1/8" (537)	23 1/16" (586)	79 3/16" (2011)	12.58 (1.17)	14.63 (1.36)	
AEOD2668	1	31 11/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	15.98 (1.48)	27 1/8" (689)	29 1/16" (738)	79 3/16" (2011)	15.82 (1.47)	18.04 (1.68)	
AEOD2868	1	33 11/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	17.08 (1.59)	29 1/8" (740)	31 1/16" (789)	79 3/16" (2011)	16.89 (1.57)	19.18 (1.78)	
AEOD3068	1	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	19.28 (1.79)	33 1/8" (841)	35 1/16" (891)	79 3/16" (2011)	19.00 (1.77)	21.46 (1.99)	
AEOD3668	1	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	22.58 (2.10)	39 1/8" (994)	41 1/16" (1043)	79 3/16" (2011)	22.13 (2.06)	24.88 (2.31)	
AEOD2080	1	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.76 (1.37)	21 1/8" (537)	23 1/16" (586)	92 3/16" (2342)	14.66 (1.36)	16.95 (1.57)	
AEOD2680	1	31 11/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	18.61 (1.73)	27 1/8" (689)	29 1/16" (738)	92 3/16" (2342)	18.45 (1.71)	20.90 (1.94)	
AEOD2880	1	33 11/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	19.89 (1.85)	29 1/8" (740)	31 1/16" (789)	92 3/16" (2342)	19.69 (1.83)	22.22 (2.06)	
AEOD3080	1	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	22.45 (2.09)	33 1/8" (841)	35 1/16" (891)	92 3/16" (2342)	22.17 (2.06)	24.86 (2.31)	
AEOD3680	1	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	26.29 (2.44)	39 1/8" (994)	41 1/16" (1043)	92 3/16" (2342)	25.84 (2.40)	28.82 (2.68)	
AEOD4068	2	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	26.46 (2.46)	44 3/16" (1122)	48 1/8" (1222)	79 3/16" (2011)	25.73 (2.39)	28.90 (2.68)	
AEOD4068	1	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	12.65 (1.18)	21" (533)	23" (584)	79 3/16" (2011)	12.28 (1.14)	28.90 (2.68)	
AEOD5068	2	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	33.06 (3.07)	56 3/16" (1427)	60 1/8" (1527)	79 3/16" (2011)	32.38 (3.01)	35.73 (3.32)	
AEOD5068	1	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	15.95 (1.48)	27" (686)	29" (737)	79 3/16" (2011)	15.60 (1.45)	35.73 (3.32)	
AEOD5468	2	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	35.26 (3.28)	60 3/16" (1529)	64 1/8" (1629)	79 3/16" (2011)	34.43 (3.20)	38.01 (3.53)	
AEOD5468	1	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	17.05 (1.58)	29" (737)	31" (787)	79 3/16" (2011)	16.63 (1.54)	38.01 (3.53)	
AEOD6068	2	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	39.66 (3.68)	68 3/16" (1732)	72 1/8" (1832)	79 3/16" (2011)	38.48 (3.57)	42.57 (3.95)	
AEOD6068	1	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	19.25 (1.79)	33" (838)	35" (889)	79 3/16" (2011)	18.65 (1.73)	42.57 (3.95)	
AEOD7068	2	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	46.26 (4.30)	80 3/16" (2037)	84 1/8" (2137)	79 3/16" (2011)	44.37 (4.12)	49.40 (4.59)	
AEOD7068	1	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	22.55 (2.09)	39" (991)	41" (1041)	79 3/16" (2011)	21.60 (2.01)	49.40 (4.59)	
AEOD4080	2	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	30.81 (2.86)	44 3/16" (1122)	48 1/8" (1222)	92 3/16" (2342)	30.08 (2.79)	33.48 (3.11)	
AEOD4080	1	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	14.72 (1.37)	21" (533)	23" (584)	92 3/16" (2342)	14.36 (1.33)	33.48 (3.11)	
AEOD5080	2	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	38.49 (3.58)	56 3/16" (1427)	60 1/8" (1527)	92 3/16" (2342)	37.80 (3.51)	41.40 (3.85)	
AEOD5080	1	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	18.57 (1.73)	27" (686)	29" (737)	92 3/16" (2342)	18.22 (1.69)	41.40 (3.85)	
AEOD5480	2	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	41.05 (3.81)	60 3/16" (1529)	64 1/8" (1629)	92 3/16" (2342)	40.22 (3.74)	44.04 (4.09)	
AEOD5480	1	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	19.85 (1.84)	29" (737)	31" (787)	92 3/16" (2342)	19.43 (1.81)	44.04 (4.09)	
AEOD6080	2	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	46.17 (4.29)	68 3/16" (1732)	72 1/8" (1832)	92 3/16" (2342)	44.99 (4.18)	49.31 (4.58)	
AEOD6080	1	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	22.41 (2.08)	33" (838)	35" (889)	92 3/16" (2342)	21.81 (2.03)	49.31 (4.58)	
AEOD7080	2	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	53.86 (5.00)	80 3/16" (2037)	84 1/8" (2137)	92 3/16" (2342)	51.96 (4.83)	57.23 (5.32)	
AEOD7080	1	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	26.25 (2.44)	39 (991)	41" (1041)	92 3/16" (2342)	25.30 (2.35)	57.23 (5.32)	


- * "Door Dimension" always refers to outside frame to frame dimension.
- * "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- * Dimensions in parentheses are in millimeters or square meters.
- * For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

Direct-Set Rectangular Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m ²)	Overall Sidelight Area Sq. Ft./ (m ²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
AESLD0868	9 15/16" (252)	82" (2083)	10 7/16" (265)	82 1/2" (2096)	3.77 (0.35)	5.66 (0.53)
AESLD1068	15 15/16" (405)	82" (2083)	16 7/16" (418)	82 1/2" (2096)	7.03 (0.65)	9.08 (0.84)
AESLD2068	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.32 (1.14)	14.63 (1.36)
AESLD3068	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.84 (1.75)	21.46 (1.99)
AESLD0880	9 15/16" (252)	95" (2413)	10 7/16" (265)	95 1/2" (2426)	4.40 (0.41)	6.56 (0.61)
AESLD1080	15 15/16" (405)	95" (2413)	16 7/16" (418)	95 1/2" (2426)	8.19 (0.76)	10.51 (0.98)
AESLD2080	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.37 (1.33)	16.95 (1.57)
AESLD3080	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	21.97 (2.04)	24.86 (2.31)

- * Sidelight Dimension always refers to outside frame to frame dimension.
- * "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- * Dimensions in parentheses are in millimeters or square meters.

Direct-Set & Sash-Set Rectangular Entry Door Sidelights

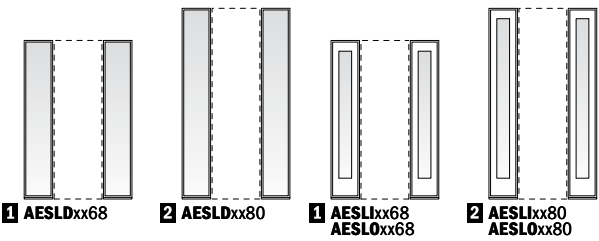

Direct-set (AESLD), sash-set inswing (AESLI) and sash-set outswing (AESLO) entry door sidelights shown. Dimensions and specifications shown for direct-set sidelights, contact your Andersen supplier for sash-set sidelight dimensions and specifications.


- * "Door Dimension" always refers to outside frame to frame dimension.
- * "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- * Dimensions in parentheses are in millimeters or square meters.
- * For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

RESIDENTIAL ENTRY DOORS




Arch Entry Door Order Designation Description

Viewed from the exterior.

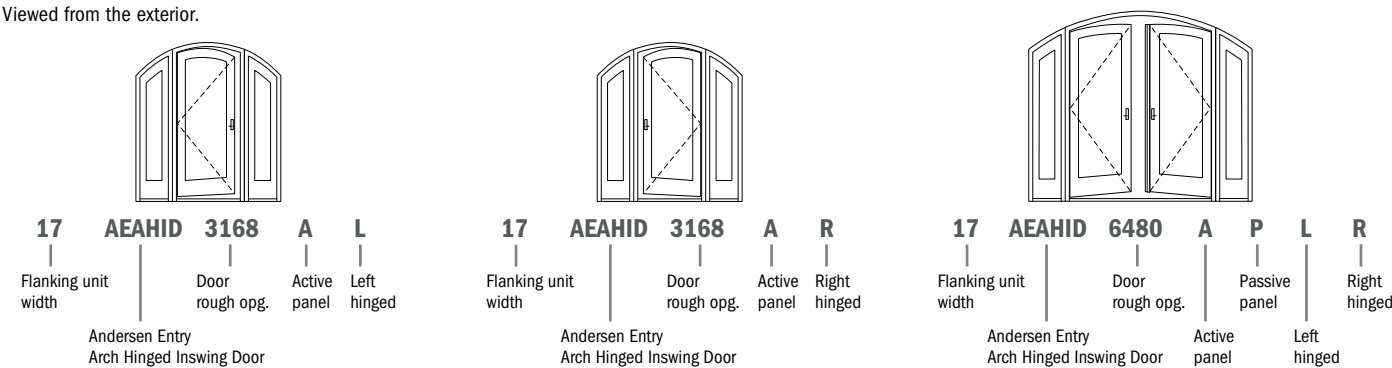


Arch inswing entry doors (**AEAHID**) shown above, for outswing arch entry doors use **AEAOD**. Outswing entry doors open outward to the exterior.

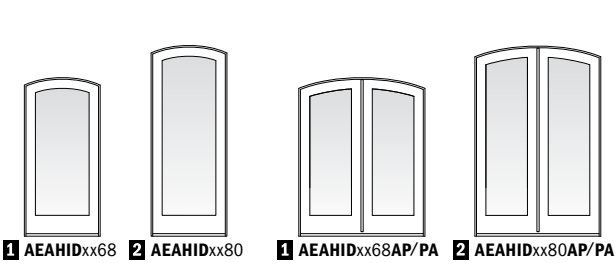

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. **AEAHID2068S** or **AEAHID4068SS**).

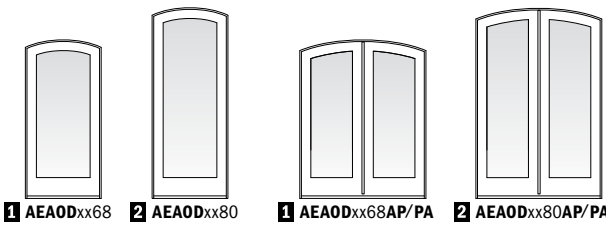

Custom-size doors are available in 1/8" (3) increments.


Available in custom designed panels. Stationary doors are also available (i.e. **AEAOD2068S** or **AEAOD4068SS**).

Arch Outswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions				Min. Rough Opening		Clear Opening Area Sq. Ft./ (m ²)	Clear Opening Maximums			Vent Area Sq. Ft./ (m ²)	Overall Door Area Sq. Ft./ (m ²)
		Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AEAOD2068	1	37 1/16" (941)	79 11/16" (2024)	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.37 (1.15)	21 1/8" (537)	23 1/16" (586)	77 1/4" (1962)	12.58 (1.17)	14.49 (1.35)
AEAOD2668	1	48" (1219)	79 5/16" (2015)	31 13/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	15.50 (1.44)	27 1/8" (689)	29 1/16" (738)	76 13/16" (1951)	15.82 (1.47)	17.85 (1.66)
AEAOD2868	1	48" (1219)	78 15/16" (2005)	33 11/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	16.50 (1.53)	29 1/8" (740)	31 1/8" (789)	76 1/2" (1943)	16.89 (1.57)	18.95 (1.76)
AEAOD3068	1	48" (1219)	78 1/8" (1984)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.44 (1.71)	33 1/8" (841)	35 1/16" (891)	75 3/4" (1924)	19.00 (1.77)	21.13 (1.96)
AEAOD3668	1	48" (1219)	76 3/4" (1949)	43 13/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	21.21 (1.97)	39 1/8" (994)	41 1/16" (1043)	74 3/8" (1889)	22.13 (2.06)	24.36 (2.26)
AEAOD2080	1	37 1/16" (941)	92 11/16" (2354)	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	12.37 (1.15)	21 1/8" (537)	23 1/16" (586)	77 1/4" (1962)	14.66 (1.36)	16.81 (1.56)
AEAOD2680	1	48" (1219)	92 5/16" (2345)	31 11/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	15.50 (1.44)	27 1/8" (689)	29 1/16" (738)	76 13/16" (1951)	18.45 (1.71)	20.71 (1.92)
AEAOD2880	1	48" (1219)	91 15/16" (2335)	33 13/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	16.50 (1.53)	29 1/8" (740)	31 1/16" (789)	76 1/2" (1943)	19.69 (1.83)	21.99 (2.04)
AEAOD3080	1	48" (1219)	91 1/8" (2315)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	18.44 (1.71)	33 1/8" (841)	35 1/16" (891)	75 3/4" (1924)	22.17 (2.06)	24.53 (2.28)
AEAOD3680	1	48" (1219)	89 3/4" (2280)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	21.21 (1.97)	39 1/8" (994)	41 1/16" (1043)	74 3/8" (1889)	25.84 (2.40)	28.30 (2.63)
AEAOD4068	2	48" (1219)	74 3/4" (1899)	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	24.23 (2.25)	44 3/16" (1122)	48 1/8" (1222)	72 1/2" (1842)	25.73 (2.39)	28.07 (2.61)
AEAOD4068	1	48" (1219)	74 3/4" (1899)	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	11.58 (1.08)	21" (533)	23" (584)	72 1/2" (1842)	12.28 (1.14)	28.07 (2.61)
AEAOD5068	2	96" (2438)	76 3/4" (1949)	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	31.00 (2.88)	56 3/16" (1427)	60 1/8" (1527)	74 1/4" (1886)	32.38 (3.01)	34.97 (3.25)
AEAOD5068	1	96" (2438)	76 3/4" (1949)	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	14.95 (1.39)	27" (686)	29" (737)	74 1/4" (1886)	15.60 (1.45)	34.97 (3.25)
AEAOD5468	2	96" (2438)	76" (1930)	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	32.76 (3.04)	60 3/16" (1529)	64 1/8" (1629)	73 9/16" (1868)	34.43 (3.20)	37.09 (3.45)
AEAOD5468	1	96" (2438)	76" (1930)	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	15.84 (1.47)	29" (737)	31" (787)	73 9/16" (1868)	16.63 (1.54)	37.09 (3.45)
AEAOD6068	2	96" (2438)	74 7/16" (1891)	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	36.06 (3.35)	68 3/16" (1732)	72 1/8" (1832)	72" (1829)	38.48 (3.57)	41.27 (3.83)
AEAOD6068	1	96" (2438)	74 7/16" (1891)	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	17.50 (1.63)	33" (838)	35" (889)	72" (1829)	18.65 (1.73)	41.27 (3.83)
AEAOD7068	2	96" (2438)	71 5/8" (1819)	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	40.49 (3.76)	80 3/16" (2037)	84 1/8" (2137)	69 5/16" (1761)	44.37 (4.12)	47.36 (4.40)
AEAOD7068	1	96" (2438)	71 5/8" (1819)	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	19.73 (1.83)	39" (991)	41" (1041)	69 5/16" (1761)	21.60 (2.01)	47.36 (4.40)
AEAOD4080	2	48" (1219)	87 3/4" (2229)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	28.57 (2.65)	44 3/16" (1122)	48 1/8" (1222)	85 1/2" (2172)	30.08 (2.79)	32.65 (3.03)
AEAOD4080	1	48" (1219)	87 3/4" (2229)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	13.66 (1.27)	21" (533)	23" (584)	85 1/2" (2172)	14.36 (1.33)	32.65 (3.03)
AEAOD5080	2	96" (2438)	89 3/4" (2280)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	36.43 (3.38)	56 3/16" (1427)	60 1/8" (1527)	87 1/4" (2216)	37.80 (3.51)	40.64 (3.78)
AEAOD5080	1	96" (2438)	89 3/4" (2280)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	17.57 (1.63)	27" (686)	29" (737)	87 1/4" (2216)	18.22 (1.69)	40.64 (3.78)
AEAOD5480	2	96" (2438)	89" (2261)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	38.55 (3.58)	60 3/16" (1529)	64 1/8" (1629)	86 9/16" (2199)	40.22 (3.74)	43.12 (4.01)
AEAOD5480	1	96" (2438)	89" (2261)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	18.63 (1.73)	29" (737)	31" (787)	86 9/16" (2199)	19.43 (1.81)	43.12 (4.01)
AEAOD6080	2	96" (2438)	87 7/16" (2221)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	42.57 (3.95)	68 3/16" (1732)	72 1/8" (1832)	85" (2159)	44.99 (4.18)	48.02 (4.46)
AEAOD6080	1	96" (2438)	87 7/16" (2221)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	20.66 (1.92)	33" (838)	35" (889)	85" (2159)	21.81 (2.03)	48.02 (4.46)
AEAOD7080	2	96" (2438)	84 5/8" (2149)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	48.09 (4.47)	80 3/16" (2037)	84 1/8" (2137)	82 5/16" (2091)	51.96 (4.83)	55.20 (5.13)
AEAOD7080	1	96" (2438)	84 5/8" (2149)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	23.44 (2.18)	39" (991)	41" (1041)	82 5/16" (2091)	25.30 (2.35)	55.20 (5.13)

- * "Door Dimension" always refers to outside frame to frame dimension.
- * **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.
- *For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.


Direct-Set and Sash-Set Arch Entry Door Sidelights

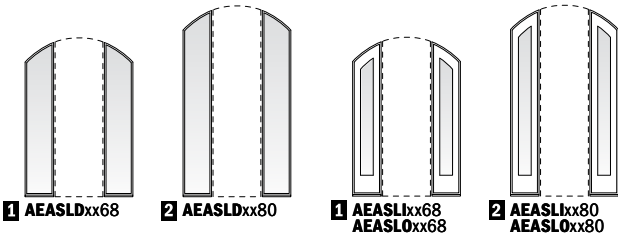

Direct-set (**AEASLD**), sash-set inswing (**AEASLI**) and sash-set outswing (**AEASLO**) entry door sidelights shown. Contact your Andersen supplier for dimensions and specifications.

- "Door Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.
- *For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

RESIDENTIAL ENTRY DOORS

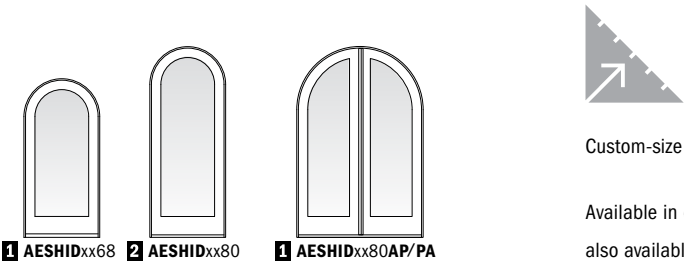

Custom-size doors are available in 1/8" (3) increments.


Available in custom designed panels.. Stationary doors are also available (i.e. **AESHID3080S** or **AESHID4080SS**).

Springline™ Inswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions				Min. Rough Opening		Clear Opening Area Sq. Ft./(m²)	Clear Opening Maximums			Vent Area Sq. Ft./(m²)	Overall Door Area Sq. Ft./(m²)
		Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AESHID3068	1	18 7/8" (479)	63 1/8" (1603)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	14.92 (1.39)	32 13/16" (833)	34 7/8" (886)	61 5/8" (1565)	18.25 (1.70)	20.41 (1.90)
AESHID3668	1	21 7/8" (556)	60 1/8" (1527)	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	16.64 (1.55)	38 13/16" (986)	40 7/8" (1038)	58 5/8" (1489)	21.21 (1.97)	23.46 (2.18)
AESHID3080	1	18 7/8" (479)	76 1/8" (1934)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	18.07 (1.68)	32 13/16" (833)	34 7/8" (886)	74 5/8" (1895)	21.40 (1.99)	23.81 (2.21)
AESHID3680	1	21 7/8" (556)	73 1/8" (1857)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	20.33 (1.89)	38 13/16" (986)	40 7/8" (1038)	71 5/8" (1819)	24.90 (2.31)	27.40 (2.55)
AESHID4080	2	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	22.68 (2.11)	43 13/16" (1113)	47 15/16" (1218)	68 1/8" (1730)	28.95 (2.69)	31.56 (2.93)
AESHID4080	1	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	10.85 (1.01)	20 7/8" (530)	22 15/16" (583)	68 1/8" (1730)	13.79 (1.28)	31.56 (2.93)
AESHID5080	2	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	25.86 (2.40)	55 13/16" (1418)	59 15/16" (1522)	62 1/8" (1578)	35.66 (3.31)	38.46 (3.57)
AESHID5080	1	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	12.48 (1.16)	26 7/8" (683)	28 15/16" (735)	62 1/8" (1578)	17.14 (1.59)	38.46 (3.57)
AESHID5480	2	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	26.70 (2.48)	59 13/16" (1519)	63 15/16" (1624)	60 1/8" (1527)	37.85 (3.52)	40.72 (3.78)
AESHID5480	1	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	12.92 (1.20)	28 7/8" (733)	30 15/16" (786)	60 1/8" (1527)	18.24 (1.69)	40.72 (3.78)
AESHID6080	2	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	28.04 (2.60)	67 13/16" (1722)	71 15/16" (1827)	56 1/8" (1426)	42.15 (3.92)	45.15 (4.19)
AESHID6080	1	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	13.62 (1.27)	32 7/8" (835)	34 15/16" (887)	56 1/8" (1426)	20.39 (1.89)	45.15 (4.19)
AESHID7080	2	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	29.22 (2.71)	79 13/16" (2027)	83 15/16" (2132)	50 1/8" (1273)	48.43 (4.50)	51.62 (4.80)
AESHID7080	1	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	14.25 (1.32)	38 7/8" (987)	40 15/16" (1040)	50 1/8" (1273)	23.53 (2.19)	51.62 (4.80)

- "Door Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.

*For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

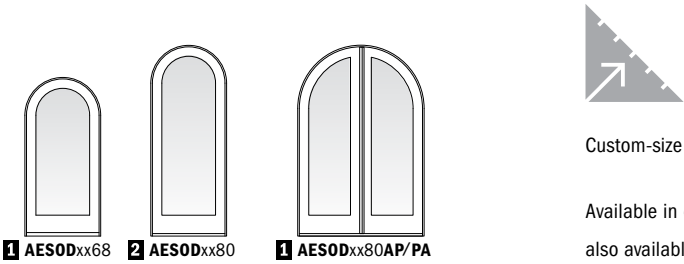

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels.. Stationary doors are also available (i.e. **AESOD3080S** or **AESOD4080SS**).


Springline™ Outswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions				Min. Rough Opening		Clear Opening Area Sq. Ft./(m²)	Clear Opening Maximums			Vent Area Sq. Ft./(m²)	Overall Door Area Sq. Ft./(m²)
		Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AESOD3068	1	18 7/8" (479)	63 1/8" (1603)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	15.01 (1.39)	33 1/8" (841)	35 1/8" (891)	61 5/8" (1565)	18.34 (1.70)	20.41 (1.90)
AESOD3668	1	21 7/8" (556)	60 1/8" (1527)	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	16.72 (1.55)	39 1/8" (994)	41 1/16" (1043)	58 5/8" (1489)	21.29 (1.98)	23.46 (2.18)
AESOD3080	1	18 7/8" (479)	76 1/8" (1934)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	18.17 (1.69)	33 1/8" (841)	35 1/16" (891)	74 5/8" (1895)	21.50 (2.00)	23.81 (2.21)
AESOD3680	1	21 7/8" (556)	73 1/8" (1857)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	20.42 (1.90)	39 1/8" (994)	41 1/16" (1043)	71 5/8" (1819)	25.00 (2.32)	27.40 (2.55)
AESOD4080	2	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	22.77 (2.12)	44 3/16" (1122)	48 1/8" (1222)	68 1/8" (1730)	29.04 (2.70)	31.56 (2.93)
AESOD4080	1	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	10.88 (1.01)	21" (533)	23" (584)	68 1/8" (1730)	13.79 (1.28)	31.56 (2.93)
AESOD5080	2	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	25.94 (2.41)	56 3/16" (1427)	60 1/8" (1527)	62 1/8" (1578)	35.74 (3.32)	38.46 (3.57)
AESOD5080	1	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	12.51 (1.16)	27" (686)	29" (737)	62 1/8" (1578)	17.14 (1.59)	38.46 (3.57)
AESOD5480	2	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	26.77 (2.49)	60 3/16" (1529)	64 1/8" (1629)	60 1/8" (1527)	37.92 (3.52)	40.72 (3.78)
AESOD5480	1	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	12.94 (1.20)	29" (737)	31" (787)	60 1/8" (1527)	18.24 (1.69)	40.72 (3.78)
AESOD6080	2	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	28.11 (2.61)	68 3/16" (1732)	72 1/8" (1832)	56 1/8" (1426)	42.23 (3.92)	45.15 (4.19)
AESOD6080	1	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	13.64 (1.27)	33" (838)	35" (889)	56 1/8" (1426)	20.39 (1.89)	45.15 (4.19)
AESOD7080	2	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	29.28 (2.72)	80 3/16" (2037)	84 1/8" (2137)	50 1/8" (1273)	48.50 (4.51)	51.62 (4.80)
AESOD7080	1	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	14.27 (1.33)	39" (991)	41" (1041)	50 1/8" (1273)	23.53 (2.19)	51.62 (4.80)

- "Door Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.

*For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

Table of Commercial Outswing Entry Door and Sidelight Sizes
Scale 1/8" = 1'-0" (1:96)

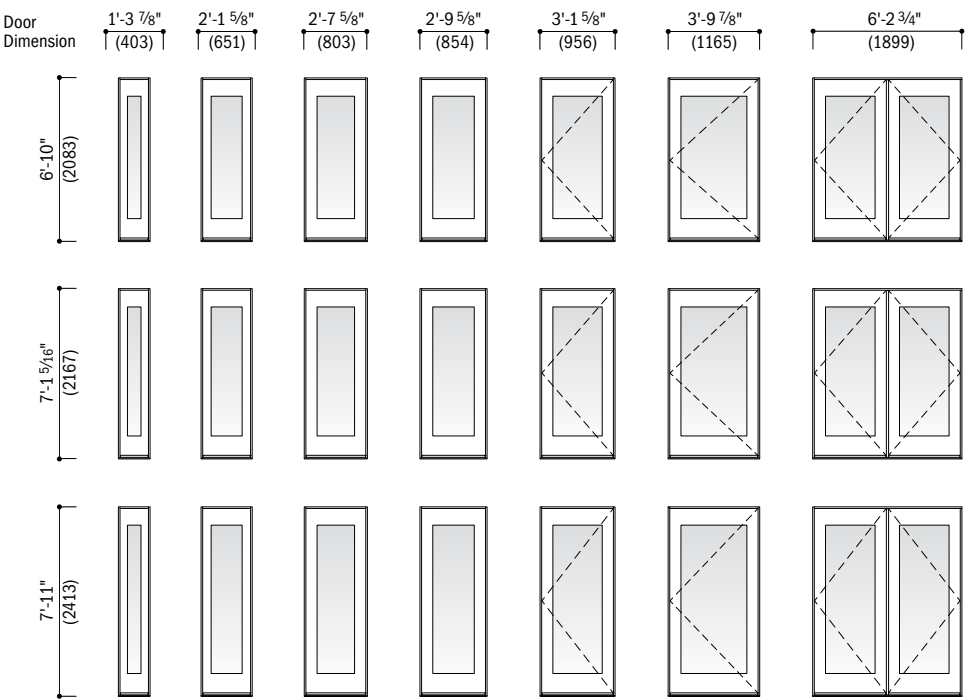

Custom-size doors are available in 1/8" (3) increments.

Standard sizes shown. See page 8 for minimum rough opening dimensions, glass area dimensions and opening specifications.


Available in both 10" (254) and 12" (305) bottom rail heights. For additional stile widths and additional options contact your Andersen supplier. This door has a limited water rating (LW) due to the low-threshold sill. Handle and lock are located between 34" (864) and 48" (1219).

Check local building codes, including the Americans with Disabilities Act (ADA) accessibility.

For entry door transoms see pages 10-11.

• Dimensions in parentheses are in millimeters.

COMMERCIAL ENTRY DOORS

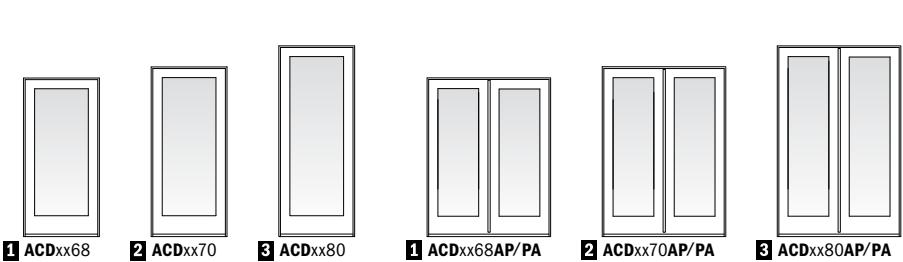

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. 3068\$ or 4068\$\$).

Commercial Outswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions		Min. Rough Opening		Clear Opening Area Sq. Ft./(m²)	Clear Opening Maximums			Glass Area Sq. Ft./(m²)	Vent Area Sq. Ft./(m²)	Overall Door Area Sq. Ft./(m²)
		Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)			
ACD3068	1	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	19.45 (1.81)	33 1/8" (841)	35 1/16" (891)	79 7/8" (2029)	10.60 (0.98)	19.45 (1.81)	21.46 (1.99)
ACD3668	1	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	22.78 (2.12)	39 1/8" (994)	41 1/16" (1043)	79 7/8" (2029)	13.15 (1.22)	22.78 (2.12)	24.88 (2.31)
ACD3868	1	45 15/16" (1167)	82" (2083)	46 7/16" (1180)	82 1/2" (2180)	24.02 (2.23)	41 3/8" (1051)	43 3/16" (1100)	79 7/8" (2029)	14.11 (1.31)	24.02 (2.23)	26.16 (2.43)
ACD3070	1	37 11/16" (957)	85 5/16" (2167)	38 3/16" (970)	85 13/16" (2180)	20.26 (1.88)	33 1/8" (841)	35 1/16" (891)	83 3/16" (2113)	11.17 (1.04)	20.26 (1.88)	22.33 (2.07)
ACD3670	1	43 11/16" (1110)	85 5/16" (2167)	44 3/16" (1122)	85 13/16" (2180)	23.72 (2.20)	39 1/8" (994)	41 1/16" (1043)	83 3/16" (2113)	13.86 (1.29)	23.72 (2.20)	25.88 (2.40)
ACD3870	1	45 15/16" (1167)	85 5/16" (2167)	46 7/16" (1180)	85 13/16" (2426)	25.02 (2.32)	41 3/8" (1051)	43 3/16" (1100)	83 3/16" (2113)	14.87 (1.38)	25.02 (2.32)	27.22 (2.53)
ACD3080	1	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	22.61 (2.10)	33 1/8" (841)	35 1/16" (891)	92 7/8" (2359)	12.84 (1.19)	22.61 (2.10)	24.86 (2.31)
ACD3680	1	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	26.48 (2.46)	39 1/8" (994)	41 1/16" (1043)	92 7/8" (2359)	15.94 (1.48)	26.48 (2.46)	28.82 (2.68)
ACD3880	1	45 15/16" (1167)	95" (2413)	46 7/16" (1180)	95 1/2" (2096)	27.94 (2.60)	41 3/8" (1051)	43 3/16" (1100)	92 7/8" (2359)	17.10 (1.59)	27.94 (2.60)	30.31 (2.82)
ACD4068	2	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	26.69 (2.48)	44 3/16" (1122)	48 1/8" (1222)	79 7/8" (2029)	12.46 (1.16)	26.69 (2.48)	28.90 (2.68)
ACD4068	1	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	12.76 (1.19)	21" (533)	23" (584)	79 7/8" (2029)	12.46 (1.16)	12.76 (1.19)	28.90 (2.68)
ACD5068	2	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	33.35 (3.10)	56 3/16" (1427)	60 1/8" (1527)	79 7/8" (2029)	16.08 (1.49)	33.35 (3.10)	35.73 (3.32)
ACD5068	1	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	16.09 (1.49)	27" (686)	29" (737)	79 7/8" (2029)	16.08 (1.49)	16.09 (1.49)	35.73 (3.32)
ACD5468	2	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	35.57 (3.30)	60 3/16" (1529)	64 1/8" (1629)	79 7/8" (2029)	17.79 (1.65)	35.57 (3.30)	38.01 (3.53)
ACD5468	1	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	17.20 (1.60)	29" (737)	31" (787)	79 7/8" (2029)	17.79 (1.65)	17.20 (1.60)	38.01 (3.53)
ACD6068	2	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	40.01 (3.72)	68 3/16" (1732)	72 1/8" (1832)	79 7/8" (2029)	21.20 (1.97)	40.01 (3.72)	42.57 (3.95)
ACD6068	1	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2180)	19.41 (1.80)	33" (838)	35" (889)	79 7/8" (2029)	21.20 (1.97)	19.41 (1.80)	42.57 (3.95)
ACD4070	2	50 3/4" (1289)	85 5/16" (2167)	51 1/4" (1302)	85 13/16" (2180)	27.80 (2.58)	44 3/16" (1122)	48 1/8" (1222)	83 3/16" (2113)	13.13 (1.22)	27.80 (2.58)	30.07 (2.79)
ACD4070	1	50 3/4" (1289)	85 5/16" (2167)	51 1/4" (1302)	85 13/16" (2180)	13.29 (1.23)	21" (533)	23" (584)	83 3/16" (2113)	13.13 (1.22)	13.29 (1.23)	30.07 (2.79)
ACD5070	2	62 3/4" (1594)	85 5/16" (2167)	63 1/4" (1607)	85 13/16" (2180)	34.73 (3.23)	56 3/16" (1427)	60 1/8" (1527)	83 3/16" (2113)	16.95 (1.57)	34.73 (3.23)	37.18 (3.45)
ACD5070	1	62 3/4" (1594)	85 5/16" (2167)	63 1/4" (1607)	85 13/16" (2180)	16.75 (1.56)	27" (686)	29" (737)	83 3/16" (2113)	16.95 (1.57)	16.75 (1.56)	37.18 (3.45)
ACD5470	2	66 3/4" (1695)	85 5/16" (2167)	67 1/4" (1708)	85 13/16" (2180)	37.04 (3.44)	60 3/16" (1529)	64 1/8" (1629)	83 3/16" (2113)	18.75 (1.74)	37.04 (3.44)	39.55 (3.67)
ACD5470	1	66 3/4" (1695)	85 5/16" (2167)	67 1/4" (1708)	85 13/16" (2180)	17.91 (1.66)	29" (737)	31" (787)	83 3/16" (2113)	18.75 (1.74)	17.91 (1.66)	39.55 (3.67)
ACD6070	2	74 3/4" (1899)	85 5/16" (2167)	75 1/4" (1911)	85 13/16" (2180)	41.67 (3.87)	68 3/16" (1732)	72 1/8" (1832)	83 3/16" (2113)	22.34 (2.08)	41.67 (3.87)	44.29 (4.11)
ACD6070	1	74 3/4" (1899)	85 5/16" (2167)	75 1/4" (1911)	85 13/16" (2426)	20.22 (1.88)	33" (838)	35" (889)	83 3/16" (2113)	22.34 (2.08)	20.22 (1.88)	44.29 (4.11)
ACD4080	2	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	31.04 (2.88)	44 3/16" (1122)	48 1/8" (1222)	92 7/8" (2359)	15.10 (1.40)	31.04 (2.88)	33.48 (3.11)
ACD4080	1	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	14.83 (1.38)	21" (533)	23" (584)	92 7/8" (2359)	15.10 (1.40)	14.83 (1.38)	33.48 (3.11)
ACD5080	2	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	38.78 (3.60)	56 3/16" (1427)	60 1/8" (1527)	92 7/8" (2359)	19.49 (1.81)	38.78 (3.60)	41.40 (3.85)
ACD5080	1	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	18.70 (1.74)	27" (686)	29" (737)	92 7/8" (2359)	19.49 (1.81)	18.70 (1.74)	41.40 (3.85)
ACD5480	2	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	41.36 (3.84)	60 3/16" (1529)	64 1/8" (1629)	92 7/8" (2359)	21.56 (2.00)	41.36 (3.84)	44.04 (4.09)
ACD5480	1	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	19.99 (1.86)	29" (737)	31" (787)	92 7/8" (2359)	21.56 (2.00)	19.99 (1.86)	44.04 (4.09)
ACD6080	2	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	46.52 (4.32)	68 3/16" (1732)	72 1/8" (1832)	92 7/8" (2359)	25.69 (2.39)	46.52 (4.32)	49.31 (4.58)
ACD6080	1	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	22.57 (2.10)	33" (838)	35" (889)	92 7/8" (2359)	25.69 (2.39)	22.57 (2.10)	49.31 (4.58)


- "Door Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.

*For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

Direct-Set Commercial Outswing Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./(m²)	Overall Sidelight Area Sq. Ft./(m²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
ACSLD0868	9 15/16" (252)	82" (2083)	10 7/16" (265)	82 1/2" (2096)	3.77 (0.35)	5.66 (0.53)
ACSLD1068	15 15/16" (405)	82" (2083)	16 7/16" (418)	82 1/2" (2096)	7.03 (0.65)	9.08 (0.84)
ACSLD2068	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.32 (1.14)	14.63 (1.36)
ACSLD3068	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.84 (1.75)	21.46 (1.99)
ACSLD0870	9 15/16" (252)	85 5/16" (2167)	10 7/16" (265)	85 13/16" (2180)	3.93 (0.37)	5.89 (0.55)
ACSLD1070	15 15/16" (405)	85 5/16" (2167)	16 7/16" (418)	85 13/16" (2180)	7.32 (0.68)	9.44 (0.88)
ACSLD2070	25 11/16" (652)	85 5/16" (2167)	26 3/16" (665)	85 13/16" (2180)	12.84 (1.19)	15.22 (1.41)
ACSLD3070	37 11/16" (957)	85 5/16" (2167)	38 3/16" (970)	85 13/16" (2180)	19.63 (1.82)	22.33 (2.07)
ACSLD0880	9 15/16" (252)	95" (2413)	10 7/16" (265)	95 1/2" (2426)	4.40 (0.41)	6.56 (0.61)
ACSLD1080	15 15/16" (405)	95" (2413)	16 7/16" (418)	95 1/2" (2426)	8.19 (0.76)	10.51 (0.98)
ACSLD2080	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.37 (1.33)	16.95 (1.57)
ACSLD3080	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	21.97 (2.04)	24.86 (2.31)

- "Sidelight Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.

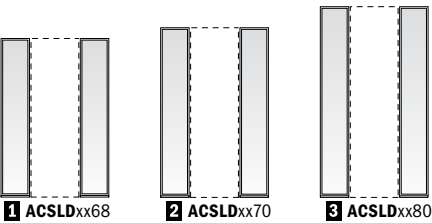


Direct-set (**ACSLD**) commercial outswing entry door sidelights.

Sash-Set Commercial Outswing Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./(m²)	Overall Sidelight Area Sq. Ft./(m²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
ACSLO1068	15 15/16" (405)	82" (2083)	16 7/16" (418)	82 1/2" (2096)	3.41 (0.32)	9.08 (0.84)
ACSLO2068	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	7.56 (0.70)	14.63 (1.36)
ACSLO2668	31 11/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	8.79 (0.82)	18.04 (1.68)
ACSLO2868	33 11/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	9.21 (0.86)	19.18 (1.78)
ACSLO1070	15 15/16" (405)	85 5/16" (2167)	16 7/16" (418)	85 13/16" (2180)	3.59 (0.33)	9.44 (0.88)
ACSLO2070	25 11/16" (652)	85 5/16" (2167)	26 3/16" (665)	85 13/16" (2180)	7.97 (0.74)	15.22 (1.41)
ACSLO2670	31 11/16" (805)	85 5/16" (2167)	32 3/16" (818)	85 13/16" (2180)	9.26 (0.86)	18.77 (1.74)
ACSLO2870	33 11/16" (856)	85 5/16" (2167)	34 3/16" (868)	85 13/16" (2180)	9.71 (0.90)	19.96 (1.85)
ACSLO1080	15 15/16" (405)	95" (2413)	16 7/16" (418)	95 1/2" (2426)	4.13 (0.38)	10.51 (0.98)
ACSLO2080	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	9.16 (0.85)	16.95 (1.57)
ACSLO2680	31 11/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	10.65 (0.99)	20.9 (1.94)
ACSLO2880	33 11/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	11.17 (1.04)	22.22 (2.06)

- "Sidelight Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.

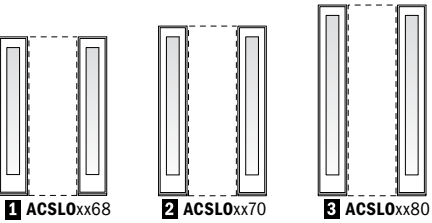

Sash-set (**ACSLO**) commercial outswing entry door sidelights.

RESIDENTIAL & COMMERCIAL ENTRY DOOR TRANSOMS



Direct-Set Rectangular Entry Door Transom Dimensions and Specifications

Transom Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m²)	Overall Sidelight Area Sq. Ft./ (m²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
AETD0812	9 15⁄16" (252)	12 13⁄16" (325)	10 7⁄16" (265)	13 5⁄16" (338)	0.47 (0.04)	0.88 (0.08)
AETD1012	15 15⁄16" (405)	12 13⁄16" (325)	16 7⁄16" (418)	13 5⁄16" (338)	0.88 (0.08)	1.42 (0.13)
AETD2012	25 11⁄16" (652)	12 13⁄16" (325)	26 3⁄16" (665)	13 5⁄16" (338)	1.55 (0.14)	2.29 (0.21)
AETD2612	31 11⁄16" (805)	12 13⁄16" (325)	32 3⁄16" (818)	13 5⁄16" (338)	1.95 (0.18)	2.82 (0.26)
AETD2812	33 11⁄16" (856)	12 13⁄16" (325)	34 3⁄16" (868)	13 5⁄16" (338)	2.09 (0.19)	3.00 (0.28)
AETD3012	37 11⁄16" (957)	12 13⁄16" (325)	38 3⁄16" (970)	13 5⁄16" (338)	2.36 (0.22)	3.35 (0.31)
AETD3612	43 11⁄16" (1110)	12 13⁄16" (325)	44 3⁄16" (1122)	13 5⁄16" (338)	2.77 (0.26)	3.89 (0.36)
AETD4012	50 3⁄4" (1289)	12 13⁄16" (325)	51 1⁄4" (1302)	13 5⁄16" (338)	3.25 (0.30)	4.52 (0.42)
AETD5012	62 3⁄4" (1594)	12 13⁄16" (325)	63 1⁄4" (1607)	13 5⁄16" (338)	4.07 (0.38)	5.58 (0.52)
AETD5412	66 3⁄4" (1695)	12 13⁄16" (325)	67 1⁄4" (1708)	13 5⁄16" (338)	4.34 (0.40)	5.94 (0.55)
AETD6012	74 3⁄4" (1899)	12 13⁄16" (325)	75 1⁄4" (1911)	13 5⁄16" (338)	4.89 (0.45)	6.65 (0.62)
AETD7012	86 3⁄4" (2203)	12 13⁄16" (325)	87 1⁄4" (2216)	13 5⁄16" (338)	5.71 (0.53)	7.72 (0.72)
AETD0817	9 15⁄16" (252)	17 13⁄16" (452)	10 7⁄16" (265)	18 5⁄16" (465)	0.71 (0.07)	1.23 (0.11)
AETD1017	15 15⁄16" (405)	17 13⁄16" (452)	16 7⁄16" (418)	18 5⁄16" (465)	1.33 (0.12)	1.97 (0.18)
AETD2017	25 11⁄16" (652)	17 13⁄16" (452)	26 3⁄16" (665)	18 5⁄16" (465)	2.33 (0.22)	3.18 (0.30)
AETD2617	31 11⁄16" (805)	17 13⁄16" (452)	32 3⁄16" (818)	18 5⁄16" (465)	2.95 (0.27)	3.92 (0.36)
AETD2817	33 11⁄16" (856)	17 13⁄16" (452)	34 3⁄16" (868)	18 5⁄16" (465)	3.16 (0.29)	4.17 (0.39)
AETD3017	37 11⁄16" (957)	17 13⁄16" (452)	38 3⁄16" (970)	18 5⁄16" (465)	3.57 (0.33)	4.66 (0.43)
AETD3617	43 11⁄16" (1110)	17 13⁄16" (452)	44 3⁄16" (1122)	18 5⁄16" (465)	4.19 (0.39)	5.40 (0.50)
AETD4017	50 3⁄4" (1289)	17 13⁄16" (452)	51 1⁄4" (1302)	18 5⁄16" (465)	4.91 (0.46)	6.28 (0.58)
AETD5017	62 3⁄4" (1594)	17 13⁄16" (452)	63 1⁄4" (1607)	18 5⁄16" (465)	6.15 (0.57)	7.76 (0.72)
AETD5417	66 3⁄4" (1695)	17 13⁄16" (452)	67 1⁄4" (1708)	18 5⁄16" (465)	6.56 (0.61)	8.26 (0.77)
AETD6017	74 3⁄4" (1899)	17 13⁄16" (452)	75 1⁄4" (1911)	18 5⁄16" (465)	7.38 (0.69)	9.25 (0.86)
AETD7017	86 3⁄4" (2203)	17 13⁄16" (452)	87 1⁄4" (2216)	18 5⁄16" (465)	8.61 (0.80)	10.73 (1.00)
AETD08111	9 15⁄16" (252)	21 13⁄16" (554)	10 7⁄16" (265)	22 5⁄16" (567)	0.91 (0.08)	1.51 (0.14)
AETD10111	15 15⁄16" (405)	21 13⁄16" (554)	16 7⁄16" (418)	22 5⁄16" (567)	1.69 (0.16)	2.41 (0.22)
AETD20111	25 11⁄16" (652)	21 13⁄16" (554)	26 3⁄16" (665)	22 5⁄16" (567)	2.96 (0.27)	3.89 (0.36)
AETD26111	31 11⁄16" (805)	21 13⁄16" (554)	32 3⁄16" (818)	22 5⁄16" (567)	3.75 (0.35)	4.80 (0.45)
AETD28111	33 11⁄16" (856)	21 13⁄16" (554)	34 3⁄16" (868)	22 5⁄16" (567)	4.01 (0.37)	5.10 (0.47)
AETD30111	37 11⁄16" (957)	21 13⁄16" (554)	38 3⁄16" (970)	22 5⁄16" (567)	4.53 (0.42)	5.71 (0.53)
AETD36111	43 11⁄16" (1110)	21 13⁄16" (554)	44 3⁄16" (1122)	22 5⁄16" (567)	5.32 (0.49)	6.62 (0.61)
AETD40111	50 3⁄4" (1289)	21 13⁄16" (554)	51 1⁄4" (1302)	22 5⁄16" (567)	6.24 (0.58)	7.69 (0.71)

- "Transom Dimension" always refers to outside frame to frame dimension.
 - "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 - Dimensions in parentheses are in millimeters or square meters.
- continued on next page




Custom-size windows are available in 1⁄8" (3) increments.



Direct-Set Rectangular Entry Door Transom

Direct-set transoms (**AETD**) provide maximum unobstructed glass. Direct-set dimensions and specifications shown.



Sash-Set Rectangular Entry Door Transoms

Sash-set single (**AETXXX-1**) and twin (**AETXXX-2**) transoms are also available. Contact your Andersen supplier for dimensions and specifications.

Direct-Set Rectangular Entry Door Transom Dimensions and Specifications *(continued)*

Transom Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m²)	Overall Sidelight Area Sq. Ft./ (m²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
AETD50111	62 3⁄4" (1594)	21 13⁄16" (554)	63 1⁄4" (1607)	22 5⁄16" (567)	7.81 (0.73)	9.51 (0.88)
AETD54111	66 3⁄4" (1695)	21 13⁄16" (554)	67 1⁄4" (1708)	22 5⁄16" (567)	8.33 (0.77)	10.11 (0.94)
AETD60111	74 3⁄4" (1899)	21 13⁄16" (554)	75 1⁄4" (1911)	22 5⁄16" (567)	9.37 (0.87)	11.32 (1.05)
AETD70111	86 3⁄4" (2203)	21 13⁄16" (554)	87 1⁄4" (2216)	22 5⁄16" (567)	10.94 (1.02)	13.14 (1.22)
AETD0827	9 15⁄16" (252)	30" (762)	10 7⁄16" (265)	30 1⁄2" (775)	1.30 (0.12)	2.07 (0.19)
AETD1027	15 15⁄16" (405)	30" (762)	16 7⁄16" (418)	30 1⁄2" (775)	2.43 (0.23)	3.32 (0.31)
AETD2027	25 11⁄16" (652)	30" (762)	26 3⁄16" (665)	30 1⁄2" (775)	4.25 (0.39)	5.35 (0.50)
AETD2627	31 11⁄16" (805)	30" (762)	32 3⁄16" (818)	30 1⁄2" (775)	5.38 (0.50)	6.60 (0.61)
AETD2827	33 11⁄16" (856)	30" (762)	34 3⁄16" (868)	30 1⁄2" (775)	5.75 (0.53)	7.02 (0.65)
AETD3027	37 11⁄16" (957)	30" (762)	38 3⁄16" (970)	30 1⁄2" (775)	6.50 (0.60)	7.85 (0.73)
AETD3627	43 11⁄16" (1110)	30" (762)	44 3⁄16" (1122)	30 1⁄2" (775)	7.63 (0.71)	9.10 (0.85)
AETD4027	50 3⁄4" (1289)	30" (762)	51 1⁄4" (1302)	30 1⁄2" (775)	8.95 (0.83)	10.57 (0.98)
AETD5027	62 3⁄4" (1594)	30" (762)	63 1⁄4" (1607)	30 1⁄2" (775)	11.20 (1.04)	13.07 (1.21)
AETD5427	66 3⁄4" (1695)	30" (762)	67 1⁄4" (1708)	30 1⁄2" (775)	11.95 (1.11)	13.91 (1.29)
AETD6027	74 3⁄4" (1899)	30" (762)	75 1⁄4" (1911)	30 1⁄2" (775)	13.45 (1.25)	15.57 (1.45)
AETD7027	86 3⁄4" (2203)	30" (762)	87 1⁄4" (2216)	30 1⁄2" (775)	15.70 (1.46)	18.07 (1.68)
AETD4029	50 3⁄4" (1289)	32" (813)	51 1⁄4" (1302)	32 1⁄2" (826)	9.62 (0.89)	11.28 (1.05)
AETD5029	62 3⁄4" (1594)	32" (813)	63 1⁄4" (1607)	32 1⁄2" (826)	12.03 (1.12)	13.94 (1.30)
AETD5429	66 3⁄4" (1695)	32" (813)	67 1⁄4" (1708)	32 1⁄2" (826)	12.84 (1.19)	14.83 (1.38)
AETD6029	74 3⁄4" (1899)	32" (813)	75 1⁄4" (1911)	32 1⁄2" (826)	14.45 (1.34)	16.61 (1.54)
AETD7029	86 3⁄4" (2203)	32" (813)	87 1⁄4" (2216)	32 1⁄2" (826)	16.87 (1.57)	19.28 (1.79)
AETD4041	50 3⁄4" (1289)	48" (1219)	51 1⁄4" (1302)	48 1⁄2" (1232)	14.92 (1.39)	16.92 (1.57)
AETD5041	62 3⁄4" (1594)	48" (1219)	63 1⁄4" (1607)	48 1⁄2" (1232)	18.67 (1.73)	20.92 (1.94)
AETD5441	66 3⁄4" (1695)	48" (1219)	67 1⁄4" (1708)	48 1⁄2" (1232)	19.92 (1.85)	22.25 (2.07)
AETD6041	74 3⁄4" (1899)	48" (1219)	75 1⁄4" (1911)	48 1⁄2" (1232)	22.42 (2.08)	24.92 (2.32)
AETD7041	86 3⁄4" (2203)	48" (1219)	87 1⁄4" (2216)	48 1⁄2" (1232)	26.17 (2.43)	28.92 (2.69)
AETD4051	50 3⁄4" (1289)	60" (1524)	51 1⁄4" (1302)	60 1⁄2" (1537)	18.90 (1.76)	21.15 (1.96)
AETD5051	62 3⁄4" (1594)	60" (1524)	63 1⁄4" (1607)	60 1⁄2" (1537)	23.65 (2.20)	26.15 (2.43)
AETD5451	66 3⁄4" (1695)	60" (1524)	67 1⁄4" (1708)	60 1⁄2" (1537)	25.23 (2.34)	27.81 (2.58)
AETD6051	74 3⁄4" (1899)	60" (1524)	75 1⁄4" (1911)	60 1⁄2" (1537)	28.40 (2.64)	31.15 (2.89)
AETD7051	86 3⁄4" (2203)	60" (1524)	87 1⁄4" (2216)	60 1⁄2" (1537)	33.15 (3.08)	36.15 (3.36)

- "Transom Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.




Custom-size windows are available in 1⁄8" (3) increments.



Direct-Set Rectangular Entry Door Transom

Direct-set transoms (**AETD**) provide maximum unobstructed glass. Direct-set dimensions and specifications shown.



Sash-Set Rectangular Entry Door Transoms

Sash-set single (**AETXXX-1**) and twin (**AETXXX-2**) transoms are also available. Contact your Andersen supplier for dimensions and specifications.

